


# LUXPOWER® SERIES 4

## 440-460W Mono

### 144 Half-Cell Layout

### M6/166mm Cell

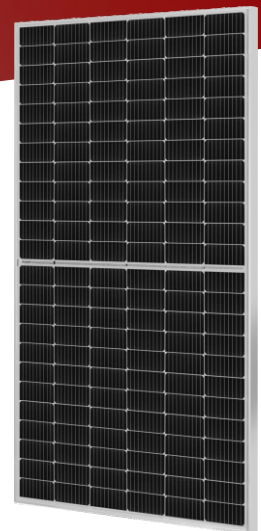

Half Cut Cell Technology



MBB Technology



Anti-PID  
Low LID  
Performance



Less Hot Spot  
Shading Effects




Low Power  
Temperature Coefficient



Lower BOS & LCOE

### Linear performance Warranty

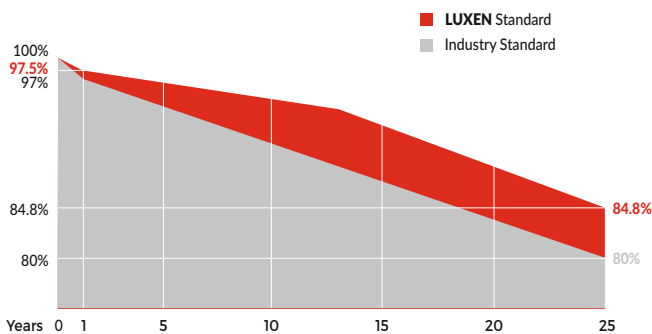


### Comprehensive Certificates

- ISO9001:2015 QMS
- ISO14001:2015 EMS
- ISO45001:2018 OHSMS
- IEC61215/IEC61730 Standard quality



**MECHANICAL CHARACTERISTICS**

Solar Cells	Mono
No. of Cells	144 (6x24)
Dimensions	2095 x 1039 x 35mm
Weight	23.0kgs
Front Glass	3.2mm coated tempered glass
Frame	Anodized aluminium alloy
Junction Box	Ip68 rated (3 by pass diodes)
	4.0mm <sup>2</sup>
Output Cables	300mm (+) / 300mm (-)
	Length can be customized
Connectors	Mc4 compatible
Mechanical load test	5400Pa

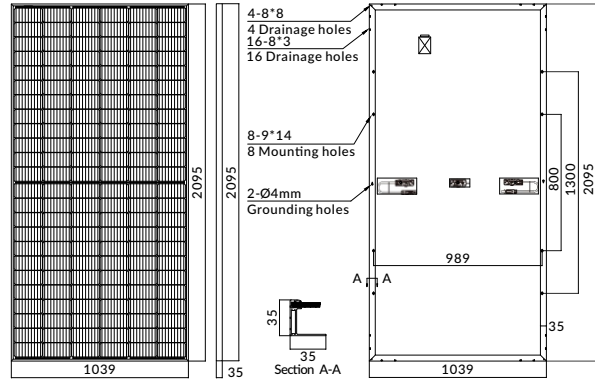

**ELECTRICAL PARAMETERS**

POWER CLASS	LNSU-440M		LNSU-445M		LNSU-450M		LNSU-455M		LNSU-460M	
	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Maximum power (Pmax)	440W	324W	445W	327W	450W	330W	455W	333W	460W	336W
Open Circuit Voltage (Voc)	49.60V	45.51V	49.79V	45.54V	49.98V	45.56V	50.17V	45.59V	50.36V	45.61V
Short Circuit Current (Isc)	11.42A	9.16A	11.48A	9.22A	11.54A	9.29A	11.60A	9.35A	11.66A	9.42A
Voltage at Maximum power (Vmpp)	41.01V	37.67V	41.20V	37.77V	41.40V	37.88V	41.59V	37.98V	41.78V	38.09V
Current Maximum Power (Impp)	10.73A	8.60A	10.80A	8.66A	10.87A	8.71A	10.94A	8.77A	11.01A	8.82A
MODULE EFFICIENCY (%)	20.21%		20.44%		20.67%		20.90%		21.13%	



STC: Irradiance 1000W/m<sup>2</sup>, cell temperature 25°C, AM1.5G    NMOT: Irradiance 800W/m<sup>2</sup>, ambient temperature 20°C, wind speed 1m/s, AM1.5G

**PACKING CONFIGURATION**

Container	20'GP	40'HQ
Pieces per pallet	31	31
Pallets per container	5	22
Pieces per container	155	682

**I-V CURVE**

**LNSU-450M/I-V**

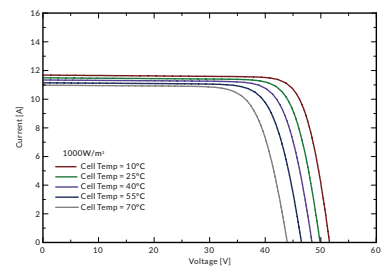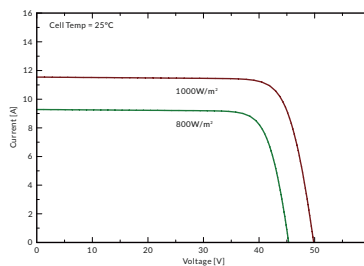

**OPERATING CHARACTERISTICS**

Operating Module Temperature	-40°C to +85°C
Maximum System Voltage	1500 DC (IEC)
Maximum Series Fuse Rating	20A
Power Tolerance	0/+5W

**TEMPERATURE CHARACTERISTICS**

Nominal Operating Temperature (NMOT)	45±2°C
Temperature Coefficient of Pmax	-0.36%/°C
Temperature Coefficient of Voc	-0.28%/°C
Temperature Coefficient of Isc	+0.05%/°C

**Note:** Due to continuous technical innovation, R&D and improvement, technical data above mentioned may be of modification accordingly. LUXEN SOLAR have the sole right to make such modification at anytime without further notice.